

Albert KOHEN et al.

main supply (V1, V2, V3) via the continuously conducting switches of said voltage controller.

*A2
Conid.*

--12. (new) A method according to claim 3, characterized in that the rotation direction of the motor (M) is chosen to be the opposite of that which would apply in the event of direct application of the multiphase voltage of the main supply (V1, V2, V3) via the continuously conducting switches of said voltage controller.--

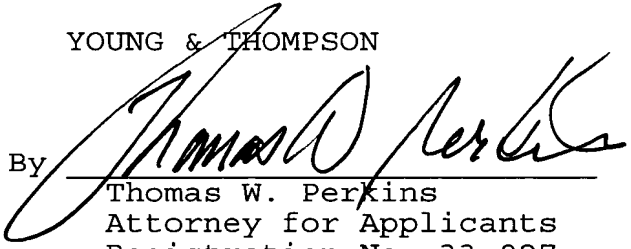
R E M A R K S

Attached hereto is a marked-up version of the changes made to claim 4 by the current amendment. The attached page is captioned "VERSION WITH MARKINGS TO SHOW CHANGES MADE".

Respectfully submitted,

YOUNG & THOMPSON

By


Thomas W. Perkins
Attorney for Applicants
Registration No. 33,027
745 South 23rd Street
Arlington, VA 22202
Telephone: 703/521-2297

December 26, 2001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

4. A method according to ~~any of claims 1 to 3~~ claim
1, characterized in that the rotation direction of the motor
(M) is chosen to be the opposite of that which would apply in
the event of direction application of the multiphase voltage
of the ~~main~~ main supply (V1, V2, V3) via the continuously
conducting switches of said voltage controller.

202150-0540
E6681001